



TBA输送带 TBA conveyor

TBA

标准产品命名规则 Standard product naming rules

TBL-030020



TBA输送带项目明细 TBA conveyor

电机功率 Motor Power	60W/90W/120W/150W
传送速度 Conveying speed	1-6m/min
皮带类型 Belt type	PVC绿色 2MM厚 2MM厚 高温: -10°C~+80°C Temperature resistance: -10°C~+80°C 抗静电, 耐磨, 耐油 Antistatic, abrasion resistant, oil resistant <input type="checkbox"/> 普通Normal <input type="checkbox"/> 防静电Anti-static
平台长度 Platform length	无
高端高度 High-end height	1100MM~1600MM可调节 1100MM~1600MM adjustable
低端高度 Low end height	900MM~1300MM可调节
电源 Power supply	单相AC220V 50Hz 标配5米电源线 Single-phase AC220V 50Hz standard 5m power cord
马达安装方向 Motor mounting direction	<input type="checkbox"/> H <input type="checkbox"/> J <input type="checkbox"/> K <input type="checkbox"/>
防护外壳 Protective cover	<input type="checkbox"/> 否 No <input type="checkbox"/> 是 Yes 材质: <input type="checkbox"/> 烤漆 <input type="checkbox"/> 不锈钢 <input type="checkbox"/> PC <input type="checkbox"/> PMMA Material: <input type="checkbox"/> baking <input type="checkbox"/> stainless steel <input type="checkbox"/> PC <input type="checkbox"/> PMMA
平台面 Platform surface	<input type="checkbox"/> 不带 No have

Features

- Without the platform, working with the robot to place the product, which is generally used in conjunction with the main line;
- Belt width from 200-600MM, increments per 100MM, length from 2000-6000MM, every 500MM increment is defined as standard;
- Standard parameters and pricing can be found in the TBA conveyor belt quotation template in the form file.

带报价模板。

TBL conveyor

TBL



特点

- 带平台，更加方便机械手放置产品，方便机械手进行堆叠之类工作；
- 皮带宽度从200-600MM，每100MM递增，长度从2000-6000MM，每500MM递增定义为标准品；
- 标准品参数及定价见表格文件TBA型输送机报价模板。

Features

- With a platform, it is more convenient for the robot to place the product, which is convenient for the robot to perform stacking and so on;
- Belt width from 200-600MM, increments per 100MM, length from 2000-6000MM, every 500MM increment is defined as standard;
- Standard parameters and pricing can be found in the TBA conveyor belt quotation template in the form file.

标准产品命名规则 Standard product naming rules



TBL输送带项目明细 TBL conveyor belt project details


电机功率 Motor Power	60W/90W/120W/200W
传送速度 Conveying speed	1-6m/min
皮带类型 Belt type	PVC绿色 2MM厚 2MM thick 高温：-10℃~+80℃ Temperature resistance -10℃~+80℃ 防静电，耐油 Antistatic, abrasion resistant, oil resistant □普通Normal □防滑 Non-slip
平台长度 Platform length	400MM
高端高度 High-end height	1100MM~1600MM可调 1100MM~1600MM adjustable
低端高度 Low end height	900MM~1300MM可调 900MM~1300MM adjustable
电源 Power supply	单相AC220V 50Hz 标配5米电源线 Single-phase AC220V 50Hz standard 5m power cord
马达安装方向 Motor mounting direction	□H □J □K □L
防护外壳 Protective cover	□否 No □是 Yes 材质：□烤漆 □不锈钢 □PC □PMMA Material: □ baking □ stainless steel □ PC □ PMMA
平台面 Platform surface	□带 have □不带 have

TBT conveyor

TBT



标准产品命名规则 Standard product naming rules

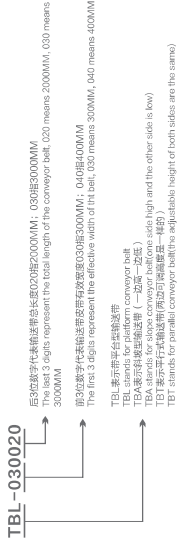

TBT输送带项目明细 TBT conveyor belt project details

电机功率 Motor Power	60W/90W/120W/200W
传送速度 Conveying speed	1-6m/min
皮带类型 Belt type	PVC绿色 2MM厚 2MM thick 高温：-10℃~+80℃ Temperature resistance -10℃~+80℃ 防静电，耐油 Antistatic, abrasion resistant, oil resistant □普通Normal □防滑 Non-slip
平台长度 Platform length	无
高端高度 High-end height	900MM~1300MM可调 900MM~1300MM adjustable
低端高度 Low end height	900MM~1300MM可调 900MM~1300MM adjustable
电源 Power supply	单相AC220V 50Hz 标配5米电源线 Single-phase AC220V 50Hz standard 5m power cord
马达安装方向 Motor mounting direction	□H □J □K □L
防护外壳 Protective cover	□否 No □是 Yes 材质：□烤漆 □不锈钢 □PC □PMMA Material: □ baking □ stainless steel □ PC □ PMMA
平台面 Platform surface	□带 No have □不带 No have

特点

- 两边一样高，上下可调，有时候也调成一边高一边低来使用；
- 皮带宽度从200-600MM，每100MM递增，长度从2000-6000MM，每500MM递增定义为标准品；
- 标准品参数及定价见表格文件TBA型输送机报价模板。

Features

- Same height at both ends, adjustable vertical height. Sometimes you can set one end high and one end low to use;
- Belt width from 200-600MM, increments per 100MM, length from 2000-6000MM, every 500MM increment is defined as standard;
- Standard parameters and pricing can be found in the TBA conveyor belt quotation template in the form file.